

# Data Sheet / Wayne Century® 3 AdBlue® dispenser

Add Speed, Add Finesse, AdBlue®

## Fuel Compatibility

- AdBlue®
- Diesel Exhaust Fluid (DEF)

## Model Availability

- Orientation: Island, Dual-sided or Single-Sided
- Grades available: 1
- Nozzles available: 1 or 2
- Hydraulic System: Remote Pressure
- Hose Management: Hose Hook or Hose Mast
- Flow Rates available: 10 or 20 lpm

## Hose Reach

- Hose Mast: 4.0 meter reach
- Hose Hook: 4.0 meter reach

## Electronics

- iGem pump computer

## Displays

- Premium 7-6-5 LED with 1.15" digits

## Totalizers

- Electromechanical 7-digit totalizers

## Communication Protocol

- DART as standard. Other protocols available

## Metering

- Secure intelligent pulser
- Electronic calibration
- Piston meter technology using P-Meter

## Heating

- Optional heating system available
- Non-ATEX heating

## Branding

- Optional customized graphics.

## Materials

- Painted hot dipped galvanized steel frame
- Painted hot dipped galvanized steel cladding

## Corrosion Protection

- C4 protection according to ISO12944-2:1998 as standard.
- Optional C5 protection available.

## Operating temperature

- From -25°C to +55°C as standard
- Optional low temperature kit option for extended temperature range -40°C to +60°C

## Relative Humidity


- From 5% to 95%

## IP Rating

- IP 54 electronic head

## Certifications

- ATEX
- OIML
- MID

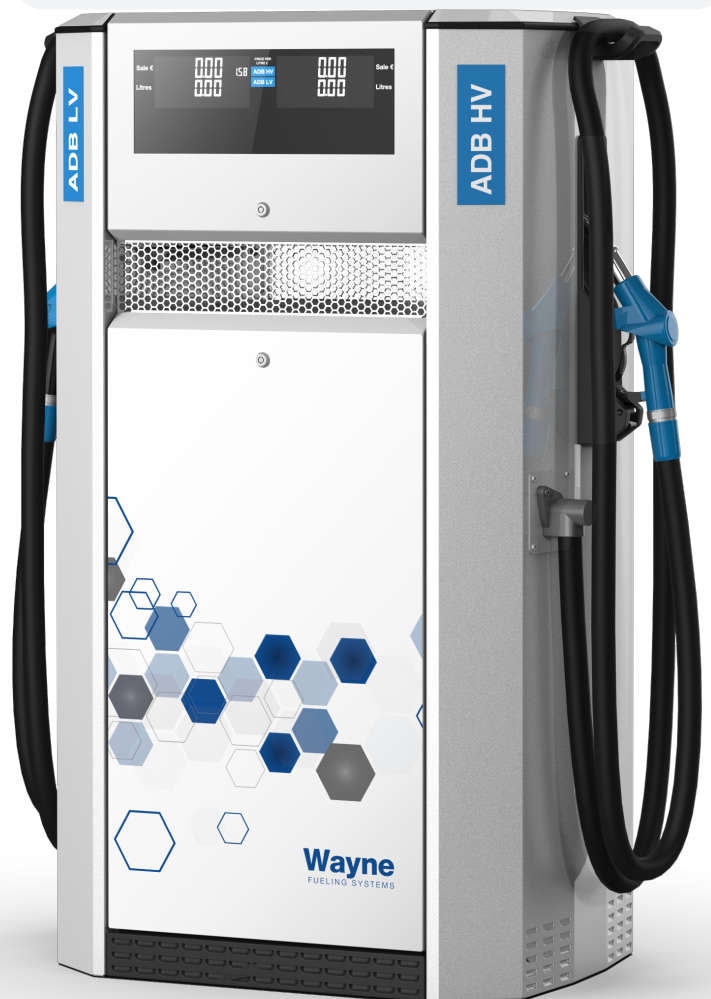

DFS Worldwide Brands