

Click on a gray shaded area to see an enlarged image.

Click the button below to go back to the original view.




BACK

NOTE: This functionality only works in Acrobat Reader


NOTES:

Note 1: All DFS equipment must be on the SAME phase!

Note 2: Use 4 mm² (12 AWG) copper for I.S. GND

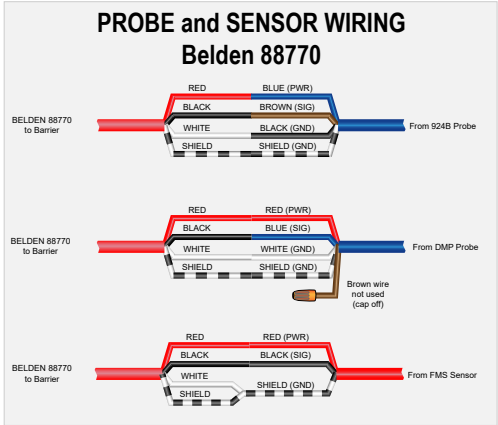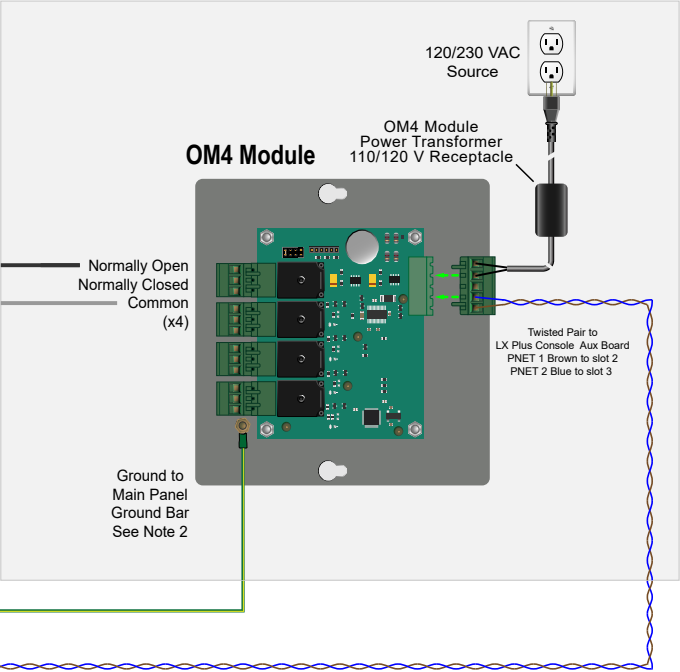
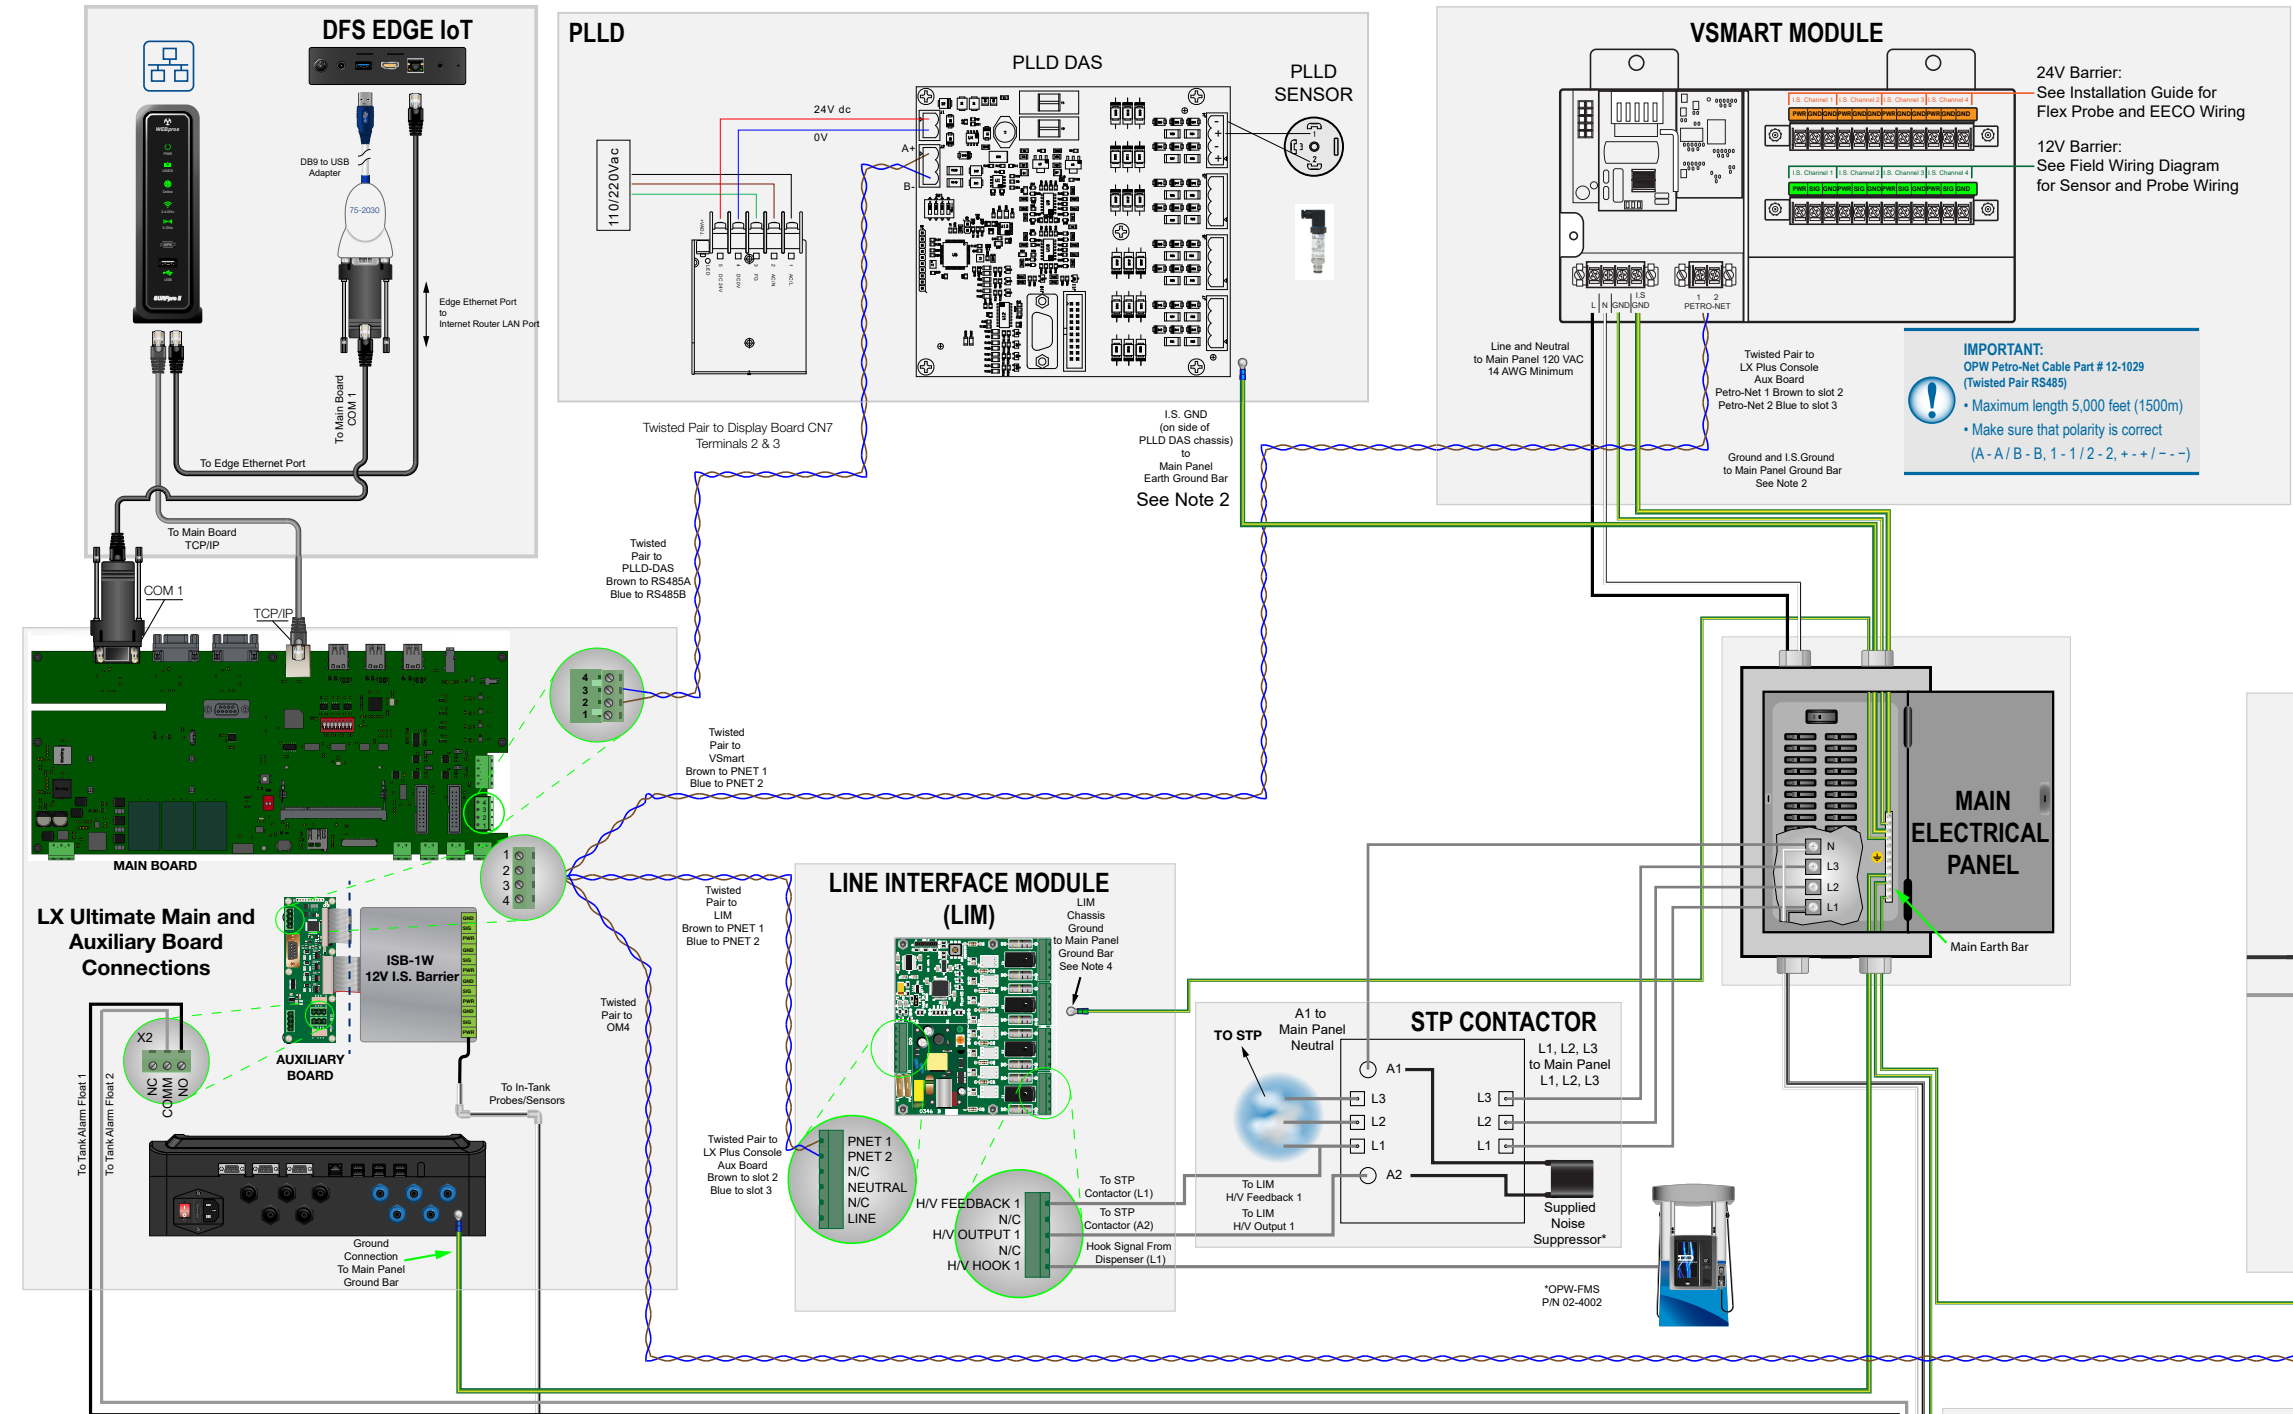


Belden 88770 is the recommended cable. However, Belden 88760 is a satisfactory alternative for most environments/installations.

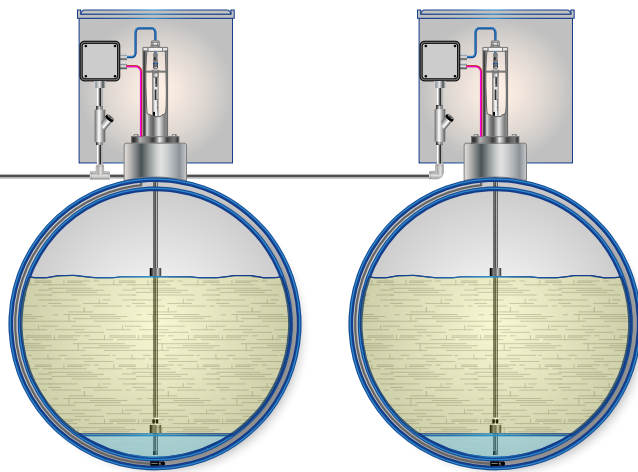

FMM2068
MagLink LX Ultimate
Wiring Diagram_r0

DOVER
FUELING SOLUTIONS

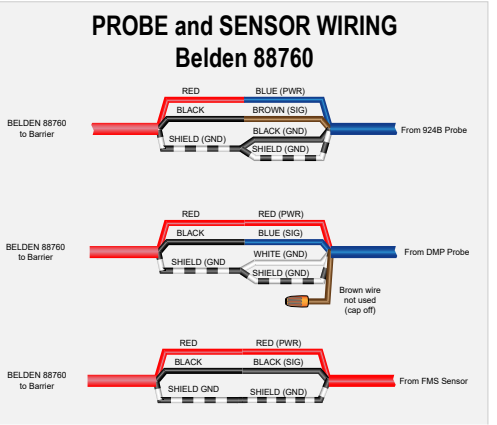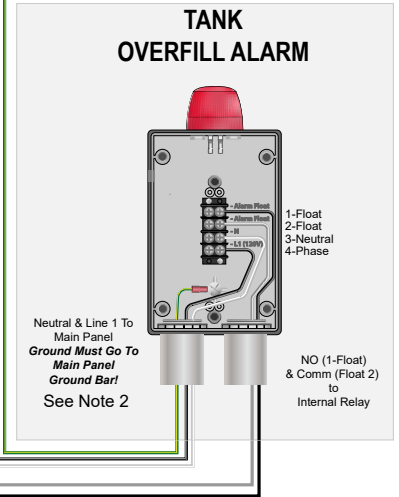

Belden 88770 is the recommended cable. However, Belden 88760 is a satisfactory alternative for most environments/installations.